

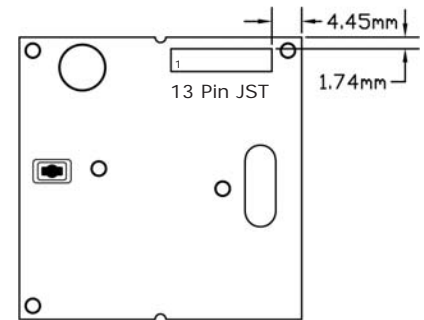
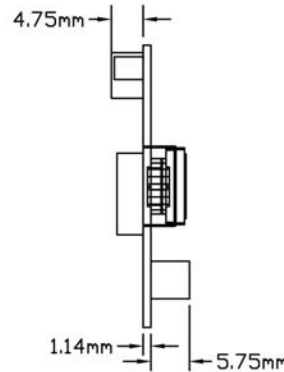


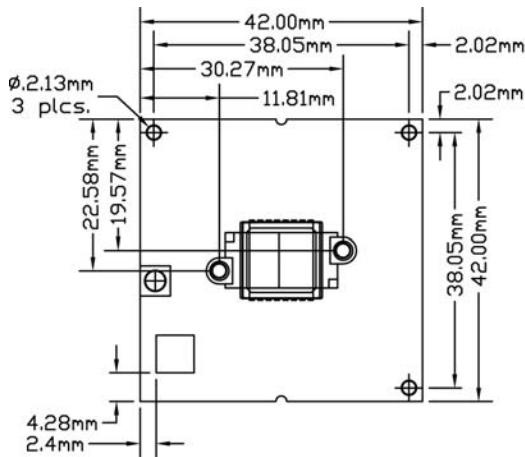

Camera Features

- High Resolution 460 TVL
- Push White Balance
- Internal Sync
- Backlight Compensation
- Mirror Mode

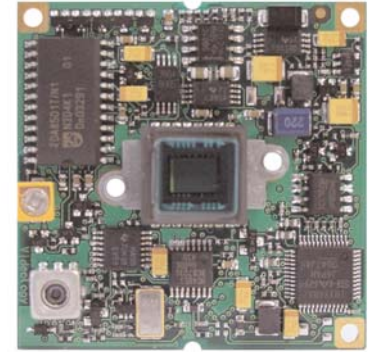

Technical Specifications

<i>Electrical</i>	20D436	21D436
	20D439	21D439
	NTSC	PAL
CCD Sensor	1/3" IL	
Active Pixels (H x V)	768 x 492	752 x 582
Horizontal Resolution	460 (TVL) CVBS	
Sensitivity	0.5 Lux (50 IRE) F1.2, 32000 K, lens transmission 80%, scene reflection 75%	
Signal to Noise Ratio	> 48 dB (AGC off)	
Gamma	Default 0.45	
Gain	Automatic (36 dB default)	
Synchronization	Internal	
Back Light Compensation	Off (Default) hardware/ software select	
White Balance	Push to set and auto, software select	
Shutter Speed	Automatic from 1/60 to 1/100,000	Automatic from 1/50 to 1/100,000
	Fixed shutter hardware/ software select	
Mirror Mode	On/Off selectable via software	
Iris	CCD Iris default / video iris	
Video Output	1Vp-p video 75 ohms composite	
Power Supply	12VDC (+3 -4) (Polarity protected)	
Power Consumption	1.7W excluding: auto iris power consumption	

Environmental

Ambient Operating Temp.	15° C ~ 55° C (5° F ~ 131° F)
Storage Temp.	-25° C ~ 70° C (-13° F ~ 158° F)

12/19/08 PDS-20D436/439 Rev I

Board Mount Lens Options

Specify "L3" suffix for 2.9mm lens (example: 20D436L3)	
L4	3.6mm
L6	6mm
L8	8mm
L12	12mm
VA	4-9mm No Iris, Varifocal
VB	4-9mm DC Iris, Varifocal
WA	2.6-6mm No Iris, Varifocal
WB	2.6-6mm DC Iris, Varifocal

Mechanical

Dimensions WxHxD	42mm x 42mm x 25mm (1.65" x 1.65" x 0.98")	
Lens Mount	20D436 / 21D436	Metal M-12 board lens mount with reference plate 12mm diameter, 0.5mm pitch
	20D439 / 21D439	Metal CS mount with reference plate: Optional C mount with interface ring 60VZZ0030
Interfaces	13 Pin JST	

Accessories

Optional	24VAC power board
----------	-------------------

All data subject to change without notice.

Videology® Imaging Solutions, Inc.

37M Lark Industrial Parkway
 Greenville, Rhode Island 02828 USA
 Tel: (401) 949 - 5332 Fax: (401) 949 - 5276
 North/South American Sales: Sales@videologyinc.com



Videology® Imaging Solutions, Europe B.V.

Neutronenlaan 4
 NL-5405NH Uden, The Netherlands
 Tel: +31 (0) 413 256261 Fax: +31 (0) 413 251712
 European Sales: Info@videology.nl