
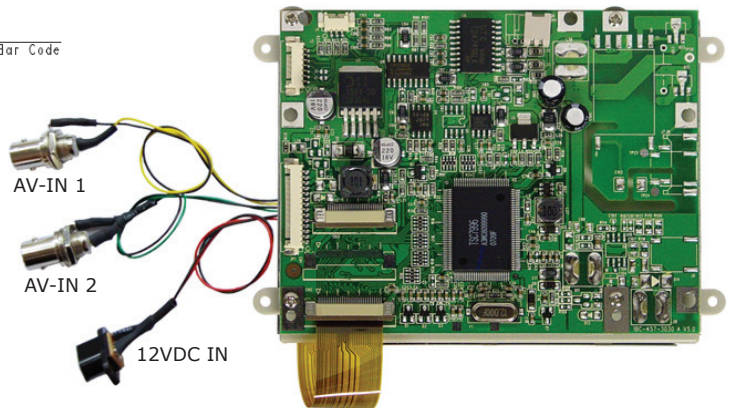
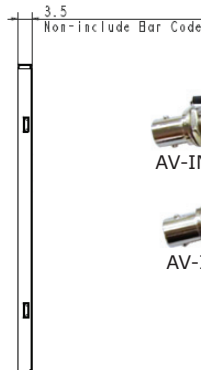


Product Features

- TFT active matrix
- Resolution (480 x 234 pixels)
- R.G.B. delta
- NTSC/PAL auto switchable
- Mirror mode
- Vertical flip

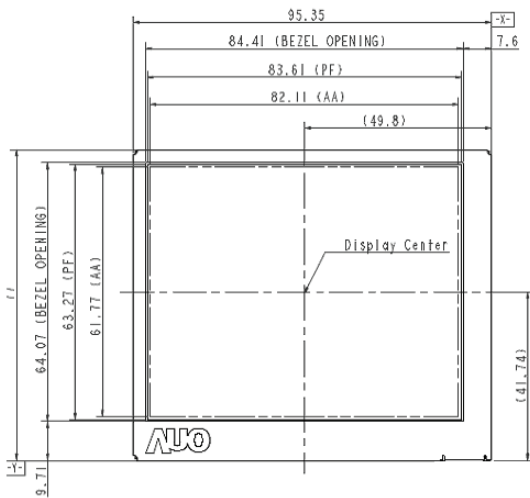

Technical Specifications

Electrical	45S040R
Operating System	NTSC/ PAL auto switchable
Picture Size	4" diagonal
Resolution (H x V)	480 x 234 pixels
LCD Type	TFT active matrix, R.G.B. Delta
Color Configuration	R.G.B. Delta
Active Pixels (W x H)	82.11 x 61.77
Dot Pitch (W x H)	0.171mm x 0.264mm
Brightness	250 cd/m ²
Contrast Ratio	150:1
Response Time	Tr: 15ms Tf: 20ms
Backlight	LED
Mirror Mode	On/Off
Vertical Flip	On/Off
Input Signal	1Vp-p composite video at 75 Ohms
Video Angle	Left 45°, Right 45°, Up 30°, Down 30°
Lamp Life-time	10,000 hr min.
Power Source	12VDC ±10%
Power Consumption	3W (max)

Environmental

Operating Temperature	0° C ~ 50° C (32° F ~ 122° F)
Storage Temperature	-20° C ~ 70° C (-4° F ~ 158° F)
Operating Humidity	Max. 85% RH
Storage Humidity	Max. 85% RH

Mechanical

Dimensions W x H x D (Panel)	95.35mm x 64.07mm x 3.5mm (3.75" x 2.52" x 0.13") minimum LCD w/ driver board
Weight	155g (0.035 lb) panel only
External Controls	Contrast, Brightness, Color, Hue (NTSC only), Saturation, Sharpness, Mirror, Vertical Flip, Volume

Accessories

Included	Cables	2 AV-IN 1 12VDC-IN
Optional	Keyboard control with LED light	

Safety Standards

	FCC, CE, UL, RoHS
--	-------------------