


Monitor Features

- TFT Active Matrix
- High Resolution (1152 x 234 pixels)
- R.G.B. Stripe Array
- NTSC/PAL Auto Selectable
- Mirror Mode
- Horizontal Flip

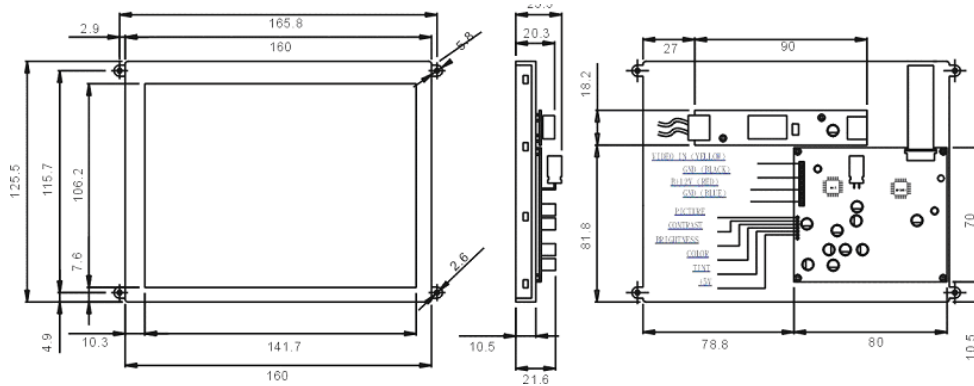

Technical Specifications

Electrical	45S068
Operating System	NTSC / PAL auto selectable
Picture Size	6.8" diagonal
Resolution (H x V)	1152 x 234 pixels
LCD Type	TFT active matrix, R.G.B. stripe
Response Time	Tr: 25ms Tf: 30ms (Typ.)
Video Angle	Left/Right 45°, Up 10°, Down 30°
Back Light	CCFT
Brightness	300cd/m ²
Contrast Ratio	150:1 Typical
Dot Pitch	0.12mm x 0.442mm
Mirror Mode	On / Off
Horizontal Flip	On / Off
Input Signal	1Vp-p Composite Video at 75 Ohms
Lamp Life-time	10,000hr (minimum temp 250 C)
Power Source	12VDC +10% (Ripple 0.5Vp-p Max)
Power Consumption	7.5 W Max

Environmental	
Operating Temperature	0°C ~ 60°C (32°F ~ 140°F)
Storage Temperature	-30°C ~ 80°C (-22°F ~ 176°F)
Operating Humidity	Under 85%
Storage Humidity	Under 85%

Mechanical	
Dimensions W x H x D	165.8mm x 125.5mm x 21.8mm (6.5" x 4.9" x 0.85")
Weight	385 ±5g (0.88 lb)
O.S.D. Controls	Contrast, Brightness, Color, Tint (NTSC only)

Accessories	
Included	Cables 2 AV-IN, 1 12VDC-IN
Optional	Keyboard control with LED light

