


## 5" Security Domes

with Wide Dynamic Range & True Day /Night Options



We've engineered our 5" indoor dome with a simple ratchet adjustment for installation ease and 355° pan/90° tilt. TRUE DAY NIGHT and WIDE DYNAMIC RANGE features extend usability from harshly lit glass foyers to delivery docks.

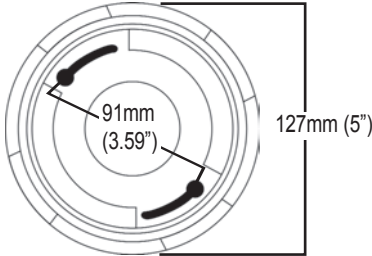

**Custom Configure Your Dome.** Choose one option from each column. Transfer the option's bold-type code to that column's box. String together (some boxes may be blank) to arrive at your custom model number.

Ring	Bubble	Sync	Wide Dynamic Range, True Day/Night	Camera 1/3" Format	Lens	Power	NTSC/PAL
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>D5</b> 5" white ring	<b>S</b> Black Slotted	<b>leave blank</b> Internal Synchronization	<b>leave blank</b> NO WDR/TDN <b>9W-VB</b> 4-9mm DC-AI lens <b>9W-WB</b> 2.6-5.6mm DC-AI lens <b>9T-VB</b> 4-9mm DC-AI lens <b>9T-WB</b> 2.6-5.6mm DC-AI lens <b>9TW-VB</b> 4-9mm DC-AI lens <b>9TW-WB</b> 2.6-5.6mm DC-AI lens	<b>leave blank</b> if WDR/TDN option is selected <b>9</b> Color 460 TVL 0.5 Lux <b>7</b> Color 330 TVL 0.5 Lux <b>3</b> B/W 570 TVL 0.05 Lux <b>1</b> B/W 420 TVL 0.01 Lux	<b>leave blank</b> if WDR/TDN option is selected <i>Varifocal</i> <b>VA</b> 4-8mm manual iris <b>VB</b> 4-8mm DC Iris <b>WA</b> 2.6-5.6mm manual iris <b>WB</b> 2.6-5.6mm DC Iris <b>XA</b> 5.5-33mm manual iris	<b>leave blank</b> 12VDC/24VAC <b>D</b> 12VDC	<b>leave blank</b> NTSC <b>P</b> PAL
<b>DB5</b> 5" black ring	<b>C</b> White Slotted <b>F</b> Fog	<b>L</b> Line Lock	W = Wide Dynamic Range T = True Day/Night		<i>Fixed</i> <b>L2</b> 2.45mm <b>L3</b> 2.97mm <b>L4</b> 3.8mm <b>L6</b> 6.0mm <b>L8</b> 8.0mm <b>L12</b> 12mm <b>L16</b> 16mm		

### Dome Accessories

Included	2.1mm to flying leads Power adapter
78V0004	Stainless steel drop ceiling adapter
77PND5B	Black ceiling pendant mount
77PND5C	Cream ceiling pendant mount
78V0003	Black plastic wall mount
78V0005	Cream plastic wall mount
60PR12DC800	Regulated 12VDC power supply
60P24VAC	24VAC power supply

### See our other dome series:

Vandal resistant indoor 4" D4V7 series
Vandal resistant outdoor 6" DW6V series - WDR & TDN options

78V0004



78V0003

